


# QUICK FILL EXTERIOR

## TOUPRELEX

### ONE COAT EXTERIOR REPAIRS

- ◆ LIGHTWEIGHT & READY TO USE
- ◆ WILL NOT SHRINK OR SLUMP
- ◆ RICH IN RESIN
- ◆ NO NEED TO SEAL THE SUBSTRATE \*

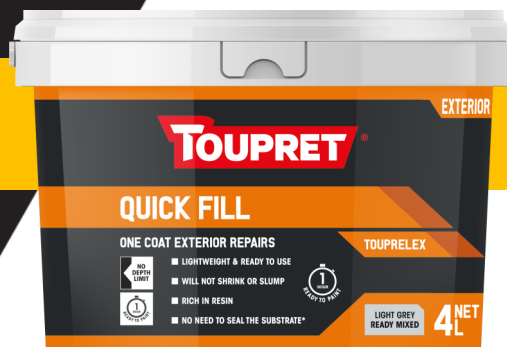

#### PURPOSE

Ideal quick exterior filler for one-coat repairs, gaps, cracks on walls.

Lightweight and ready to use, doesn't shrink and ready to paint in 1 hour.

#### SUBSTRATES

Quick Fill can be applied to either painted or unpainted substrates:

- Gypsum plaster, cement, concrete, cellular concrete
- Breeze blocks, bricks, stones, old painted surfaces.

#### OVERCOATING

Quick Fill can be overcoated with any type of filler, paint or wall coating.

Do not coat directly with polyurethane paints nor epoxy solvent based paints.

#### Physical and technical FEATURES

- Quick Fill: is a filler in ready mixed form, for exterior use, made of lightweight loads and resins.
- Characterization (NFT 36-005): Family IV-4b.
- Codification (EN 16-566):  $G_3S_2V_0W_0A_0C_0R_0$ .
- Mixing rate: ready to use.
- Application thickness: no depth limit.
- Capacity: 1L fills 1L.
- Setting time: second coat as soon as the filler is hard and dry to the touch.
- Overcoating: can be painted in 1 hour average time (after complete drying).
- Color: light grey.
- Adhesion: filler/substrate (EN 16-566):  $> 0.8$  Mpa.

#### USE AND STORAGE CONDITIONS

- Application tools: filling knife, trowel or blade.
- Tool cleaning: after use, product residue can be rubbed off tools when dry (water cleaning is not necessary).
- Preservation: product guaranteed 12 months. Stored away from sunlight and frost. If found to be faulty within the guarantee period, we will arrange a replacement on proof of purchase.

#### PACKAGING

Tub: 1L and 4L.

#### RECOMMENDATIONS and care for use

The times mentioned are indicative and depend on the substrate, coat thickness, and the ambient conditions.

Do not apply at a temperature below 5°C or above 35°C nor at a relative humidity over 80%.

#### SUBSTRATES PREPARATION

Substrates to be prepared as per the current trade practices.

\*Substrates must be hard, cohesive, clean, sound and dry.

#### NORMATIVE DOCUMENTS to be referred to

- BS EN 16566:2014 (Paints and varnishes. Fillers for internal and/or external works).

#### HEALTH AND SAFETY

It is recommended to wear gloves and glasses while applying Quick Fill.

Always wear a dust mask when sanding.

Dispose of unused product and packaging responsibly at your local waste collection centre.

Preservatives: Contains 1,2-benzisothiazolin-3-one; C(M)IT / MIT (3:1); MBIT. May produce an allergic reaction.

Safety data sheet available at [www.toupret.co.uk](http://www.toupret.co.uk)

The data sheet information, especially the guidelines relevant to the application and final use of the product are provided in good faith and result from TOUPRET's experience and knowledge of the products. The product should be used as per the trade practices rules book and in reference to our recommendations. The information provided is relevant to applications processed at a temperature of 20°C, a relative humidity of 50% and on average absorbency substrates. The times mentioned are only indicative and depend on the substrate, the coat thickness, and the ambient conditions.